


the Specification of Polycrystal Solar Module1 265W 30V

IV-CURVE

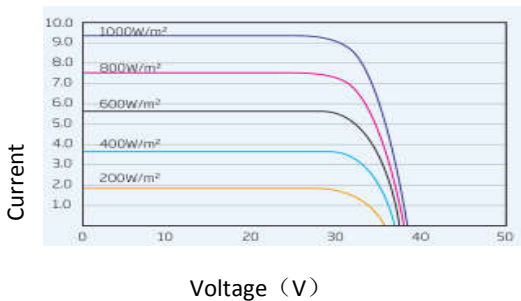

ELECTRICAL DATA (STC)

NPP-265
-60

Peak Power Watts-PMAX (Wp)	265
Power Output Tolerance-PMAX (W)	0/+3
Operating Voltage-VMP(V)	36.2
Operating Current-IMP(A)	8.71
Open Circuit Voltage-VOC (V)	42.8
Short Circuit Current-ISC (A)	9.41
Module Efficiency η_m (%)	18.1

STC: Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C, *Measuring tolerance: ±3%.

MECHANICAL DATA

Solar Cells	Polycrystal 156×156mm
Cell Orientation	60 cells (6 × 10)
Module Dimensions	1640 × 992 × 40mm
Weight	19kg
Glass	2mm (0.13 inches), High Transmission Glass
Frame	Anodized Aluminium Alloy
J-Box	IP 65 rated
Cables	General Cable 4.0mm² ,900 mm
Connector	Original MC4 Connector

TEMPERATURE RATINGS

NOCT(Nominal Operating Cell Temperature)	45°C (±2°C)
Temperature Coefficient of PMAX	- 0.44%/°C
Temperature Coefficient of VOC	- 0.33%/°C
Temperature Coefficient of ISC	0.046%/°C

WARRANTY

10 year Product Workman ship Warranty
25 year Linear Power Warranty

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1000VDC(IEC) 600V DC(UL)
Max Series Fuse Rating	15A



•Excellent mechanical load resistance:Certified to withstand high wind loads(2400Pa) and snow loads(5400Pa)



•Guarantee output power, ((0~+3%)



•Outstanding performance in low-light irradiance environment



•100% EL double-inspection ensures modules are defects free



•comprehensive certificates: IEC61215, IEC61730, UL1703,TUV safety class II, CQC , CE,ISO9001-ISO1400

photovoltaic module specification holes

